



MobileConnect / CinemaConnect

Quick Guide | Kurzanleitung | Guide rapide | Guida rapida | Guía de inicio rápido | Guia rápido | Beknopte handleiding | Krótka instrukcja obsługi | Snabbguide | Kort vejledning | Pikaohje | Γρήγορος οδηγός | Kısa Kılavuz | Краткая инструкция | 快速指南 | 快速使用指南 | クイックガイド | 요약 설명서

Power supply

AC Power supply

Connect audio

- 1 AUDIO BREAKOUT
2x RCA unbalanced
- 2 ADAT/SPDIF
Toslink input
8 channels, 24 bit
- 3 SPDIF/AES
1x RCA
- 4 ANALOG IN
4x 1/4" (6.3 mm)
TRS jack
servo balanced

Switch on

Briefly press the button

boot up system running

Select network mode

Select Stand Alone Mode or Integrated Mode

i → System Information:
MobileConnect & CinemaConnect

↓

Sennheiser Documentation App
 iOS: <https://itunes.apple.com/in/app/id1088213590>
 Android: <https://play.google.com/store/apps/details?id=com.sennheiser.documentationApp>

or online:
<http://www.sennheiser-sites.com/responsive-manuals/connectsystem/index.html>

Stand Alone Mode

Access point PoE injector

OUT IN

LAN 1

ConnectStation provides DHCP service to access point and clients via LAN 1

Integrated Mode

Connect directly to existing network infrastructure via LAN 2.

LAN LAN 2

ConnectStations will acquire IP via DHCP (or static configuration via Admin Interface).

Connect laptop

Connect laptop to LAN 3
 Laptop: assign static IP address 192.168.0.2
 Browser: open 192.168.0.10

LAN 3

Admin interface

- Enter user name and password
- Follow instructions in Web Interface.

Default:
 user name: admin
 password: sennheiser

✓ Proceed with configuring the system. Once configured, the system is ready to connect to a mobile device containing the MobileConnect/CinemaConnect App

Specifications

Dimensions W x D x H	48.3 cm x 24.0 cm x 4.4 cm (19.0" x 9.5" x 1.7")
Weight	2.9 kg (6.39 lbs)
Power supply	100 - 240 V AC, 50/60 Hz, max. 600 mA
Power	60 W nominal
Operating temperature	+5 °C to +45 °C (41 °F to 113 °F)
Storage temperature	-20 °C to +75 °C (-4 °F to 167 °F)
Operating humidity	10 % to 90 % @ 25 °C non-condensing
Storage humidity	5 % to 95 % @ 25 °C non-condensing

AUDIO BREAKOUT

Input	2x RCA unbalanced
Input impedance	10 kW
Input sensitivity	Low gain, +4 dBu, -10 dBV
Resolution AD	24 bit
Frequency response AD	5 Hz to 21.5 kHz @ 44.1 kHz, -0.5 dB

ADAT/SPDIF

Input	TOSLINK
Standard	8 channels, 24 bit, up to 48 kHz
Lock range	31.5 to 50 kHz

SPDIF/AES


Input	1x RCA
SPDIF compatible	IEC 60958
Impedance	75 W
Lock range	27 to 200 kHz

ANALOG IN

Input	4x 1/4" (6.3 mm) TRS jack, servo balanced
Input impedance	10 kW
Input sensitivity	Low gain, +4 dBu, -10 dBV
Resolution AD	24 bit
Frequency response AD	5 Hz to 21.5 kHz @ 44.1 kHz, -0.5 dB
Sample rate	48 kHz

i For more detailed specifications please refer to the product specification sheet in the download area of the product page or in the global download area at www.sennheiser.com/download.

Switch off

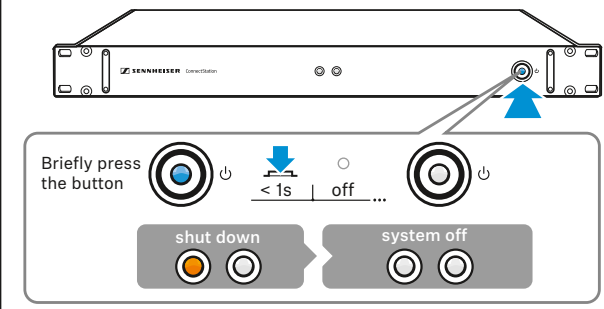

Delivery includes

MobileConnect/CinemaConnect EU/UK/US

- 1x ConnectStation CS1-M or CS1-C
- 1x Power Supply Cable, 1.8 m
- 1x 15-pin D-sub to 4 x RCA analog, 2 x MIDI, 1x phones
- 1x 9-pin D-sub to 2 x RCA digital (SPDIF)
- 1x Toslink Cable 2 mm, 2 m
- 3x Ethernet Cable Cat5e, 1m

MobileConnect/CinemaConnect + WiFi EU/UK/US

delivery as above, including:


- 1x WiFi Access Point
- 1x PoE Power over Ethernet Injector
EU/US/UK/AU for Access Point

Specifications

List of Audio Channels

Analog In 4 Channels	Active
SPDIF	Active
Analog I/O 2 Channels	Active
ADAT Input	Active
ADAT Output	N.A.


Troubleshooting



▷ check **Admin Interface**

▷ check **Sennheiser Documentation**

Sennheiser Documentation App



Available on the **App Store**

or online at
www.sennheiser.com/download

▷ use **latest firmware**: <http://www.sennheiser.com/mobileconnect>
<http://www.sennheiser.com/cinemaconnect>